
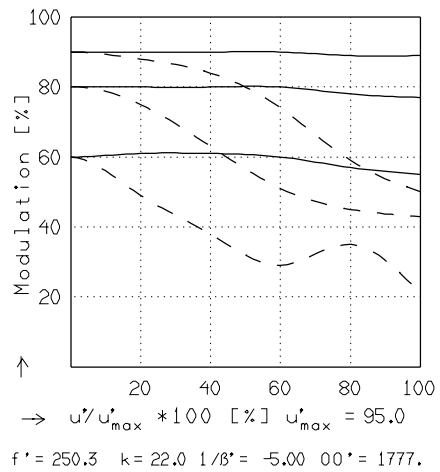
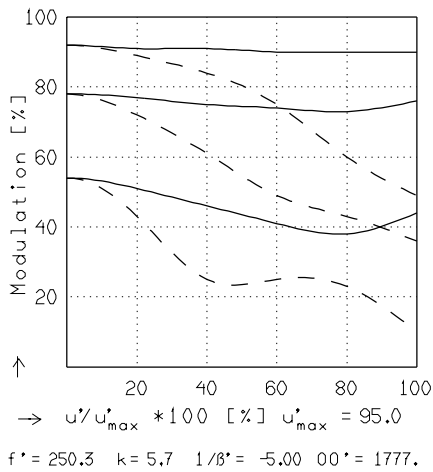
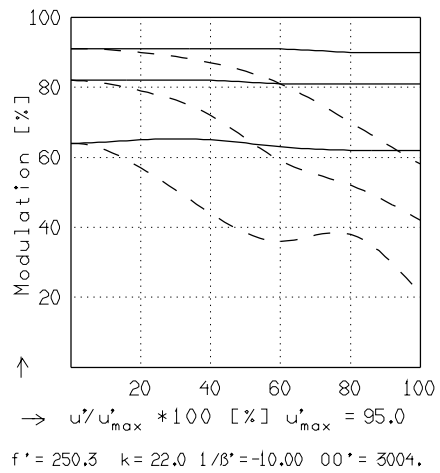
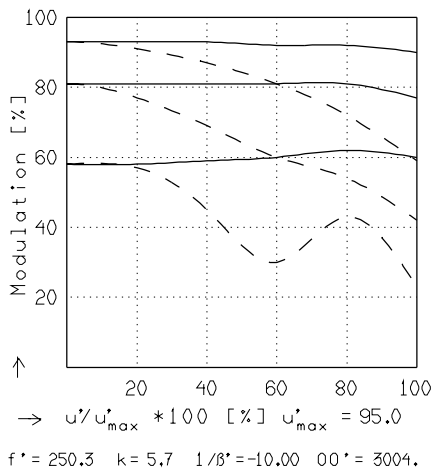
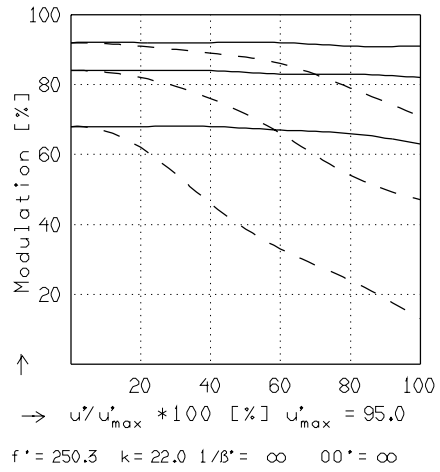


TELE-XENAR 5.6/250

MODULATION als Funktion der relativen Bildgröße

|                       |           |       |        |      |      |      |     |
|-----------------------|-----------|-------|--------|------|------|------|-----|
| Wellenlänge $\lambda$ | [nm]      | 546   | 644    | 588  | 480  | 436  | 405 |
| Spektrale Gewichtung  | [%]       | 24.6  | 18.6   | 22.1 | 12.4 | 15.2 | 7.1 |
| Ortsfrequenz R        | [1/mm]    | 5     | 10     | 20   |      |      |     |
| Format                | [mm X mm] | 90.0  | X120.0 |      |      |      |     |
| Diagonale $2u'$       | [mm]      | 190.0 |        |      |      |      |     |

radial —  
 tangential - -

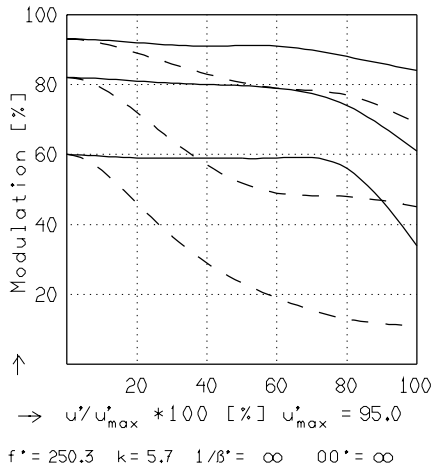

Fokussierung  $MTF_{max}$  bei  $k = 5.6$  ,  $R = 20$  1/mm,  $u'/u'_{max} = 0$

46435 30998    Gedruckt in der Bundesrepublik Deutschland    3.188    3.188    3.188    3.188    3.188    3.188    3.188    3.188